

POS PRINTER




SLK-TE323

- Energy star qualified for power efficiency
- High speed printing : 300mm/sec
- Paper width adjustable 50~82.5mm
- ESC/POS command compatible
- Various O/S drivers : Windows Driver(2012, 8, 7, 2008, VISTA, 2003, XP, 32bit & 64bit), Windows CE & Mobile Driver & SDK(CE 4.2 ~, Mobile 5.0 ~), Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver, iOS SDK, Android(2.1 ~) SDK, Windows SDK




APPLICATIONS

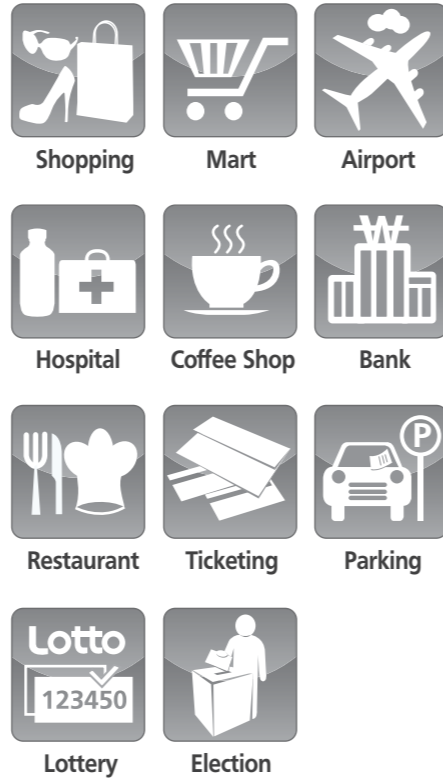

EASY-LOAD DESKTOP THERMAL POS PRINTER

SLK-TE323



MODEL		SLK-TE323
PRINTING	METHOD	Direct Thermal
	SPEED	Max. 300mm/sec
	WIDTH	72mm(512 Dots/Line)
PAPER	RESOLUTION	180DPI
	TYPE	Thermal Paper
	WIDTH	50mm ~ 82.5mm
RELIABILITY	THICKNESS	0.06mm ~ 0.09mm
	ROLL DIAMETER	Max. ø 80.0mm
	ROLL CORE INNER	12.5mm ± 0.5mm
AUTO CUTTER	TPH LIFE	160km
	MCBF	60,000,000Lines
SENSOR	STANDARD	Paper End, Paper Low, Cover Open
	OPTION	Black Mark
INTERFACE		USB (B type) plus one more card selectable (Serial, Parallel, Wi-Fi, Ethernet, Bluetooth(iOS))
EMULATION		ESC/POS Command Compatible
DRIVER		Windows Driver(2012, 8, 7, 2008, VISTA, 2003, XP, 32bit & 64bit), Windows CE & Mobile Driver & SDK(CE 4.2 ~, Mobile 5.0 ~), Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver, iOS SDK, Android(2.1 ~) SDK, Windows SDK
POWER	TYPE	External SMPS
	AC	100 ~ 240Vac 50/60 Hz
TEMPERATURE	DC	24Vdc / 1.75A
	OPERATION	5 ~ 40°C
DIMENSION	STORAGE	-20 ~ 60°C
		156 x 203 x 155 mm (W x D x H)
WEIGHT		1.7kg
COLOR		Cool grey, Ivory



INTERFACE



ACCESSORY

Melody box

